


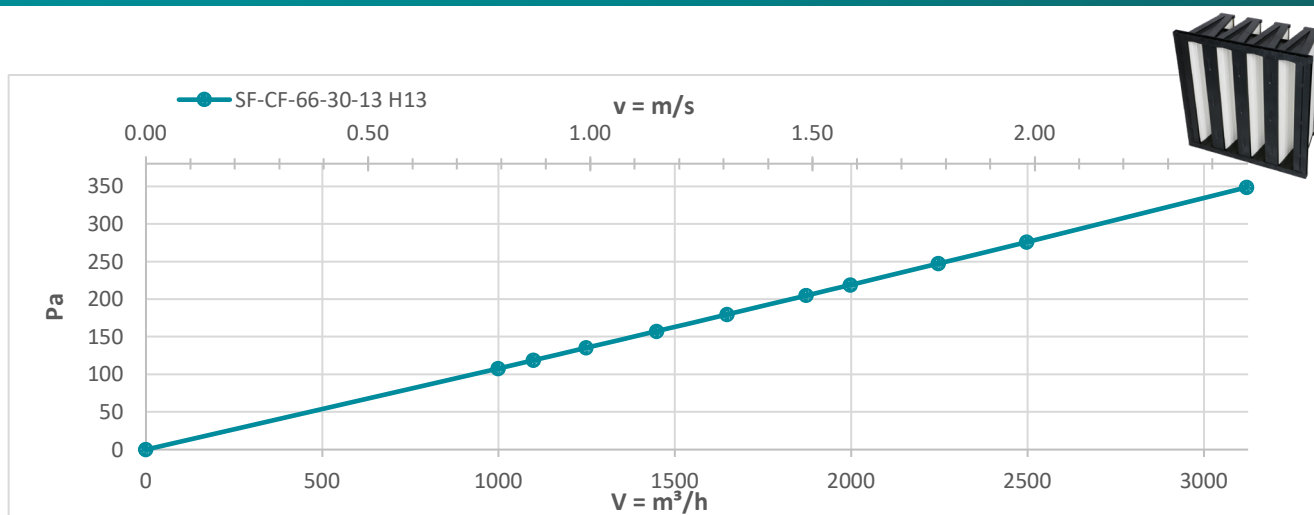


Test specimen 592 x 592 mm

SF-CF-66-30-13 H13	
Dimensions (mm) Width x Height x Depth:	592 x 592 x 292
Filter Area (m²):	18.00
Volume Flow (m³/h):	2'500
Initial Pressure Differential (Pa):	270
Final pressure difference (Pa):	600
Burst pressure (Pa):	>1'000
Filter class according to EN 1822:2019:	H13
Max. Operating Temperature (°C):	65
Fire Behavior According to DIN EN ISO 11925-2:2010:	E
Fire Behavior According to DIN 4102:	B2
Raw Materials:	Glass
Filter Media Color:	white
Property:	mini-pleat
Frame Type:	Plastic

Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
66	592 x 592 x 292	18.00	2'500
56	490 x 592 x 292	15.00	2'050
46	402 x 592 x 292	12.40	1'700
36	287 x 592 x 292	8.50	1'200
66	592 x 592 x 292	18.00	2'500
56	490 x 592 x 292	15.00	2'050


Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
46	402 x 592 x 292	12.40	1'700
36	287 x 592 x 292	8.50	1'200
66	592 x 592 x 292	18.00	2'500
56	490 x 592 x 292	15.00	2'050
46	402 x 592 x 292	12.40	1'700
36	287 x 592 x 292	8.50	1'200

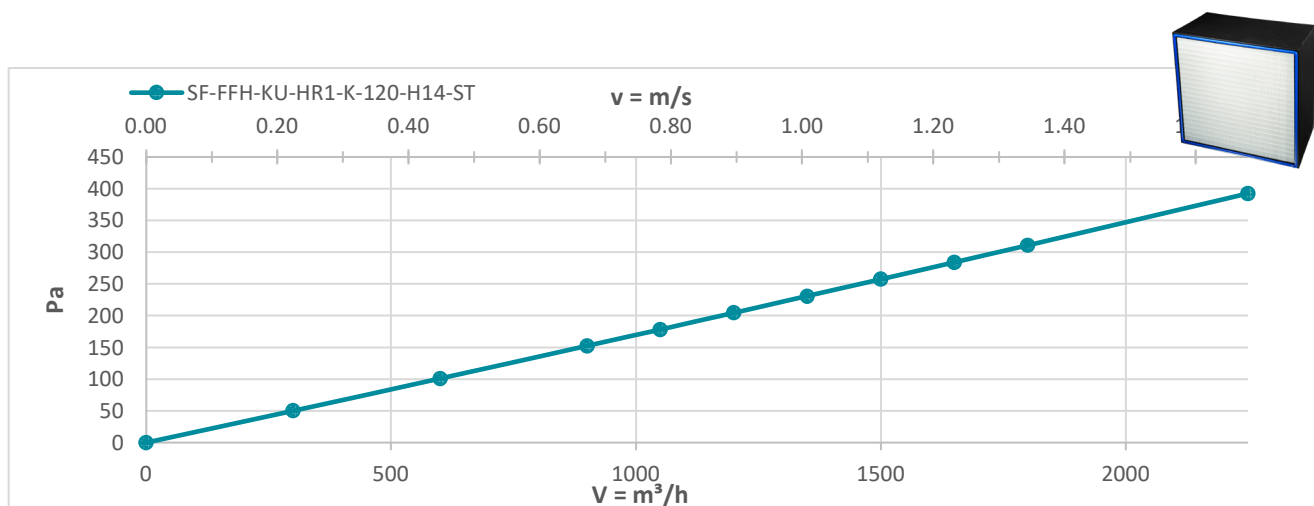

SF-FFH-KU-HR1-K-120-H14-ST	
Dimensions (mm) Width x Height x Depth:	610 x 610 x 292
Filter Area (m²):	17.20
Volume Flow (m³/h):	1'800
Initial Pressure Differential (Pa):	315
Final pressure difference (Pa):	600
Burst pressure (Pa):	>1'000
Filter class according to EN 1822:2019:	H14
Max. Operating Temperature (°C):	65
Fire Behavior According to DIN EN ISO 11925-2:2010:	E
Fire Behavior According to DIN 4102:	B2
Seal:	Semicircular, foamed
Raw Materials:	Glass
Filter Media Color:	white
Property:	mini-pleat
Frame Type:	Plastic

Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
	610 x 610 x 292	17.20	1'800
	305 x 610 x 292	8.40	900
	610 x 610 x 292	17.20	1'800
	305 x 610 x 292	8.40	900
	610 x 610 x 292	17.20	1'800
	305 x 610 x 292	8.40	900
	610 x 610 x 292	16.10	1'800
	305 x 610 x 292	7.70	900
	610 x 610 x 292	16.10	1'800
	305 x 610 x 292	7.70	900
	610 x 610 x 292	16.10	1'800
	305 x 610 x 292	7.70	900


Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
	610 x 610 x 150	14.90	1'800
	305 x 610 x 150	7.30	900
	610 x 610 x 150	14.90	1'800
	305 x 610 x 150	7.30	900
	610 x 610 x 150	14.90	1'800
	305 x 610 x 150	7.30	900
	610 x 610 x 150	14.00	1'800
	305 x 610 x 150	6.60	900
	610 x 610 x 150	14.00	1'800
	305 x 610 x 150	6.60	900
	610 x 610 x 150	14.00	1'800
	305 x 610 x 150	6.60	900

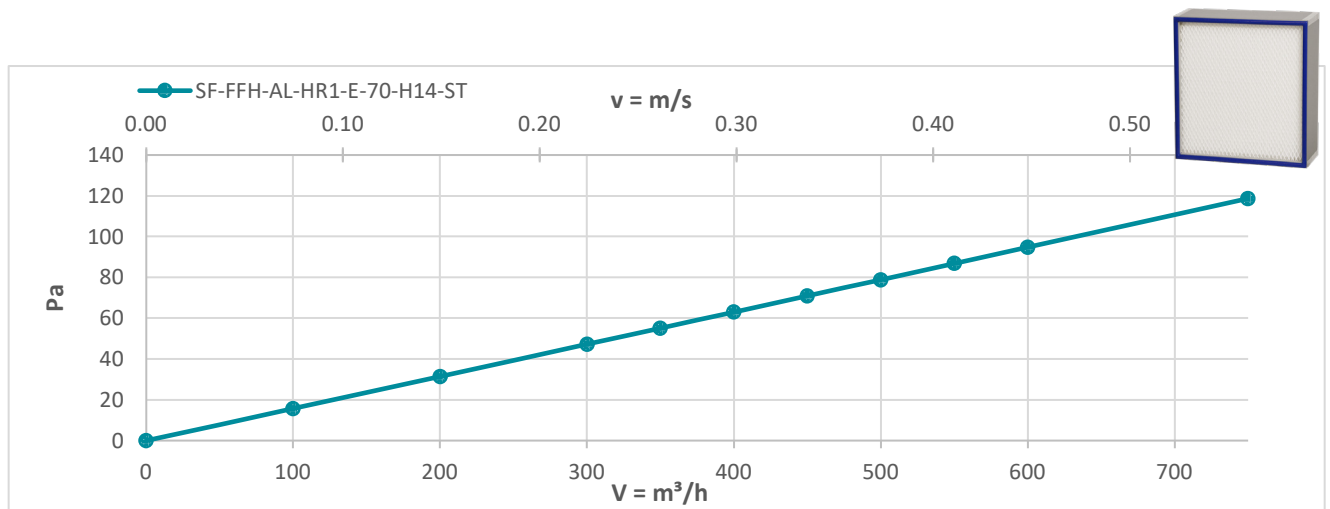

SF-FFH-AL-HR1-E-70-H14-ST	
Dimensions (mm) Width x Height x Depth:	610 x 610 x 90
Filter Area (m²):	14.00
Volume Flow (m³/h):	600
Initial Pressure Differential (Pa):	95
Final pressure difference (Pa):	600
Burst pressure (Pa):	>1'000
Filter class according to EN 1822:2019:	H14
Max. Operating Temperature (°C):	65
Fire Behavior According to DIN EN ISO 11925-2:2010:	E
Fire Behavior According to DIN 4102:	B2
Seal:	Semicircular, foamed
Raw Materials:	Glass
Filter Media Color:	white
Property:	mini-pleat
Frame Type:	Aluminum

Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
	610 x 610 x 90	14.00	600
	305 x 610 x 90	6.90	300
	610 x 610 x 90	14.00	600
	305 x 610 x 90	6.90	300
	610 x 610 x 90	14.00	600
	305 x 610 x 90	6.90	300
	610 x 610 x 90	13.20	600
	305 x 610 x 90	6.30	300
	610 x 610 x 90	13.20	600
	305 x 610 x 90	6.30	300
	610 x 610 x 90	13.20	600
	305 x 610 x 90	6.30	300

Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
	610 x 610 x 78	11.00	600
	305 x 610 x 78	5.40	300
	610 x 610 x 78	11.00	600
	305 x 610 x 78	5.40	300
	610 x 610 x 78	11.00	600
	305 x 610 x 78	5.40	300
	610 x 610 x 78	10.40	600
	305 x 610 x 78	4.90	300
	610 x 610 x 78	10.40	600
	305 x 610 x 78	4.90	300
	610 x 610 x 78	10.40	600
	305 x 610 x 78	4.90	300

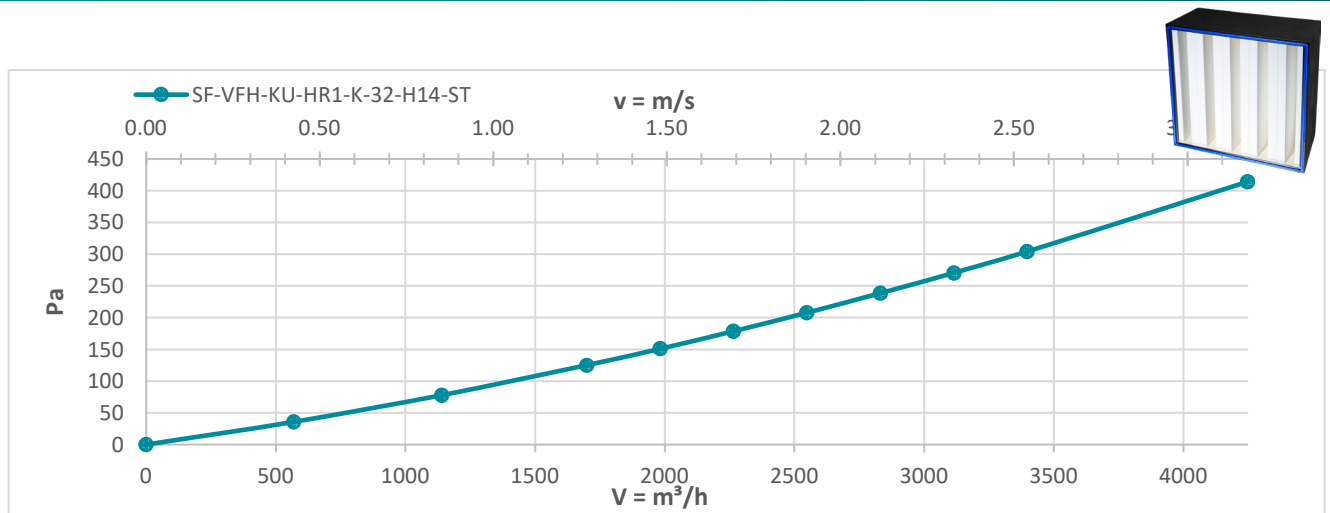

SF-VFH-KU-HR1-K-32-H14-ST	
Dimensions (mm) Width x Height x Depth:	610 x 610 x 292
Filter Area (m²):	38.00
Volume Flow (m³/h):	3'400
Initial Pressure Differential (Pa):	305
Final pressure difference (Pa):	600
Burst pressure (Pa):	>1'000
Filter class according to EN 1822:2019:	H14
Max. Operating Temperature (°C):	65
Fire Behavior According to DIN EN ISO 11925-2:2010:	E
Fire Behavior According to DIN 4102:	B2
Seal:	Semicircular, foamed
Raw Materials:	Glass
Filter Media Color:	white
Property:	mini-pleat
Frame Type:	Plastic

Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
	610 x 610 x 292	38.00	3'400
	305 x 610 x 292	17.00	1'650
	610 x 610 x 292	38.00	3'400
	305 x 610 x 292	17.00	1'650
	610 x 610 x 292	38.00	3'400
	305 x 610 x 292	17.00	1'650

Typ	Dimensions (mm) Width x Height x Depth	Filter Area (m²)	Volume Flow (m³/h)
	610 x 610 x 292	30.50	2'700
	305 x 610 x 292	13.50	1'350
	610 x 610 x 292	30.50	2'700
	305 x 610 x 292	13.50	1'350
	610 x 610 x 292	30.50	2'700
	305 x 610 x 292	13.50	1'350